

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 December 2003 (24.12.2003)


PCT

(10) International Publication Number  
WO 03/106228 A1

- (51) International Patent Classification<sup>7</sup>: B60R 21/16
- (21) International Application Number: PCT/SE03/00932
- (22) International Filing Date: 5 June 2003 (05.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0214004.4 18 June 2002 (18.06.2002) GB
- (71) Applicant (for all designated States except US): AUTO-LIV DEVELOPMENT AB [SE/SE]; S-447 83 Vårgårda (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BRADBURN, Alan [GB/GB]; 23 The Moat, Weston Coyney, Stoke on Trent, Staffordshire ST3 6NB (GB).
- (74) Agent: MEULLER, Erik; Autoliv Development AB, S-447 83 Vårgårda (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GI, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: AIR-BAG

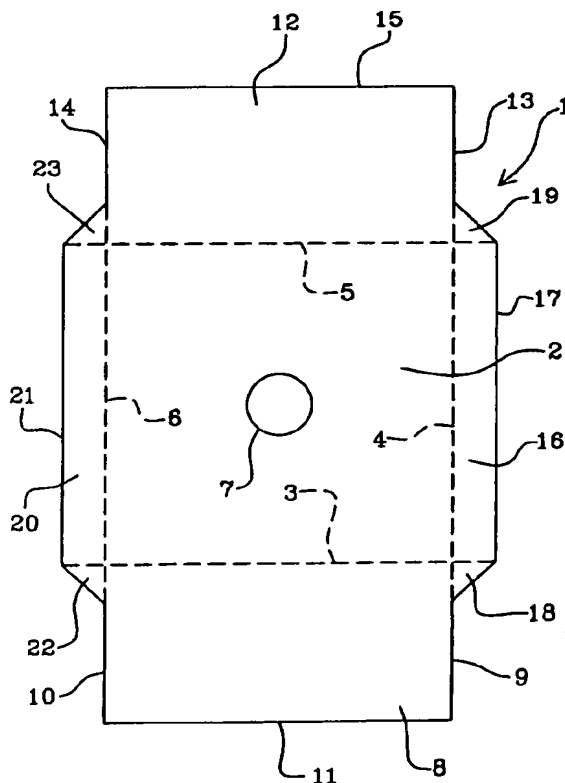

(57) Abstract: An air-bag is formed from a single element of laminar material such as fabric. The element (1) defines a rectangular region (2) having linear side edges. This region has a shape and configuration equivalent to that of the air-bag when inflated. Each side of the region carries a protruding flap (11, 12, 16, 20). There are infill elements (18, 19, 22, 23) between adjacent flaps. The flaps are inwardly folded to overlie the rectangular region. Each infill element lies between two respective inwardly folded adjacent flaps. The folded element may be secured to form an air-tight air-bag with reinforced corners.

WO 03/106228 A1